


# Felt Wall Groove



Whether you seek perfect pattern or a little alluring natural chaos, Felt Wall Groove is your go-to wallcovering. Different from our standard Wall Panels, Groove adds a little extra design-focus with its routed geometric channels. There are three designs to choose from: Metro, Stria and Doodle. The designs are made to be tiled for spaces big and small.

Absorption Coefficient vs. Freq (Hz)

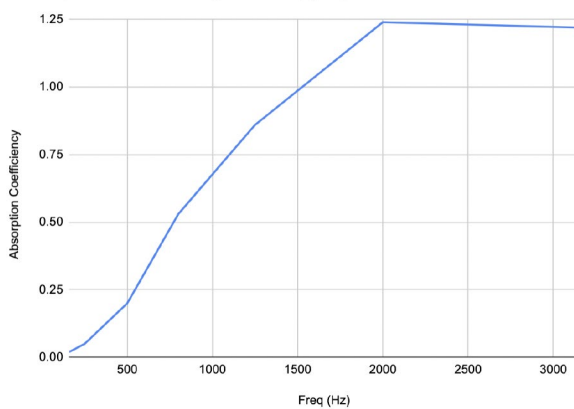

Freq (Hz)	Absorption Coefficient
160	0.02
250	0.05
500	0.20
800	0.53
1250	0.86
2000	1.00
3150	1.22
<b>NRC</b>	<b>0.59</b>

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type F-25 Mounting using 1 Shape Shift unit attached to the wall with 3/4" stand-off mounting to simulate a typical wall panel installation.

# Specifications

<b>Product Name</b>	Felt Wall Groove
<b>Lead Times</b>	Fast Ship: 4 weeks Standard: 10 weeks
<b>Content</b>	100% Polyester (PET) with a minimum of 60% recycled content
<b>Thickness</b>	12mm
<b>Length</b>	23.5"
<b>Height</b>	23.5"
<b>Weight</b>	.55 lbs/per sq ft
<b>Edge Options</b>	Exposed felt
<b>Sound Performance</b>	ASTM C423-17: NRC = up to 0.59 depending on install method
<b>Fire Performance</b>	Product made from Class A PET felt material tested under ASTM-84
<b>Variations</b>	Mode Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.
<b>Environmental</b>	Low VOC emissions, formaldehyde and phenol-free. Red List free.
<b>Maintenance</b>	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.
<b>Warranty</b>	10 years
<b>Unit of Sale</b>	Per Unit, minimum order quantity: 8

## Installation


Mode peel and stick for the easiest installation or contractor supplied construction adhesive

# Standard Colors

acoustic felt

## Mode Acoustic Felt Reference Card

To request a felt tip card or replacement swatches, please email: [hello@modeacoustic.com](mailto:hello@modeacoustic.com)

<b>FROST</b> mode-01	<b>SMOKE</b> mode-02	<b>SLATE</b> mode-03	<b>WHITE OAK</b> mode-oak	<b>SAND</b> mode-13	<b>TOAST</b> mode-14
<b>PEBBLE</b> mode-04	<b>ASH</b> mode-05	<b>GRAPHITE</b> mode-06	<b>BIRCH</b> mode-birch	<b>FLAME</b> mode-15	<b>SUNSET</b> mode-16
<b>DUSK</b> mode-07	<b>SLATE BLUE</b> mode-08	<b>GROVE</b> mode-09	<b>BARN WOOD</b> mode-barn	<b>HARVEST</b> mode-17	<b>MEADOWN</b> mode-18
<b>ARCTIC</b> mode-10	<b>DEEP</b> mode-11	<b>INK</b> mode-12	<b>WALNUT</b> mode-walnut		

modeacoustic.com | 800.222.1028 | [hello@modeacoustic.com](mailto:hello@modeacoustic.com)

## Special Order

<b>SUNFLOWER</b>	<b>SWEET PEA</b>	<b>GREEN BEAN</b>	<b>70'S DARK WASH</b>	<b>80'S ACID WASH</b>	<b>90'S FADED</b>
<b>TANGERINE</b>	<b>CAPPUCCINO</b>	<b>LATTÉ</b>	<b>SALT &amp; PEP</b>	<b>MARBLE</b>	<b>SNOW</b>
<b>ESPRESSO</b>	<b>ENZO</b>	<b>CHARCOAL</b>	<b>SHADOW</b>		

# Designs

