


Felt Wall Groove



Whether you seek perfect pattern or a little alluring natural chaos, Felt Wall Groove is your go-to wallcovering. Different from our standard Wall Panels, Groove adds a little extra design-focus with its routed geometric channels. There are three designs to choose from: Metro, Stria and Doodle. The designs are made to be tiled for spaces big and small.

Absorption Coefficient vs. Freq (Hz)

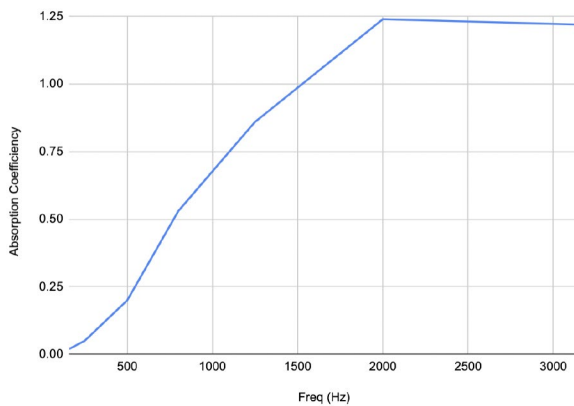

Freq (Hz)	Absorption Coefficient
160	0.02
250	0.05
500	0.20
800	0.53
1250	0.86
2000	1.00
3150	1.22
NRC	0.59

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type F-25 Mounting using 1 Shape Shift unit attached to the wall with 3/4" stand-off mounting to simulate a typical wall panel installation.

Specifications

Product Name	Felt Wall Groove
Lead Times	Fast Ship: 4 weeks Standard: 10 weeks
Content	100% Polyester (PET) with a minimum of 60% recycled content
Thickness	12mm
Length	23.5"
Height	23.5"
Weight	.55 lbs/per sq ft
Edge Options	Exposed felt
Sound Performance	ASTM C423-17: NRC = up to 0.59 depending on install method
Fire Performance	Product made from Class A PET felt material tested under ASTM-84
Variations	Mode Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.
Environmental	Low VOC emissions, formaldehyde and phenol-free. Red List free.
Maintenance	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.
Warranty	10 years
Unit of Sale	Per Unit, minimum order quantity: 8

Installation

Mode peel and stick for the easiest installation or contractor supplied construction adhesive

Standard Colors

acoustic felt

Mode Acoustic Felt Reference Card

To request a felt tip card or replacement swatches, please email: hello@modeacoustic.com

FROST mode-01	SMOKE mode-02	SLATE mode-03	WHITE OAK mode-oak	SAND mode-13	TOAST mode-14
PEBBLE mode-04	ASH mode-05	GRAPHITE mode-06	BIRCH mode-birch	FLAME mode-15	SUNSET mode-16
DUSK mode-07	SLATE BLUE mode-08	GROVE mode-09	BARN WOOD mode-barn	HARVEST mode-17	MEADOW mode-18
ARCTIC mode-10	DEEP mode-11	INK mode-12	WALNUT mode-walnut		

modeacoustic.com | 800.222.1028 | hello@modeacoustic.com

Special Order

SUNFLOWER	SWEET PEA	GREEN BEAN	70'S DARK WASH	80'S ACID WASH	90'S FADED
TANGERINE	CAPPUCCINO	LATTÉ	SALT & PEP	MARBLE	SNOW
ESPRESSO	ENZO	CHARCOAL	SHADOW		

Designs

