



Mode Acoustic Wood Ceiling Herringbone Plank System



Mode Wood acoustics are designed to seamlessly cover larger surface areas simply, beautifully, and most importantly, functionally. Transforming simple walls and ceilings into stunning ambient or accent additions, that also solve a space's sound challenge, has never been easier. Other wood systems require additional acoustic materials, large holes or gaps, and sub-walls. Mode wood products are different, they are the acoustic planks, no extra work or products required. And thanks to our close partnership with Sanfoot, Mode Wood can be matched and sequenced across millwork, MDF, and direct to drywall veneer.

Welcome to the next generation of wood panels. The noise canceling acoustic core adds function, updated materials are eco-friendly and dramatically reduce weight, and installation is simpler. Only the great look of the old panels remains.

Specifications


Product Name	Mode Acoustic Wood Ceiling Herringbone Plank System
Lead Time	10 weeks
Content	Premium wood veneer, MDF, and an acoustical core with 56% recycled materials
Thickness	1"
Plank Width	6"
Plank Length	48"
Tolerance	1/16"
Weight	1.5lbs per sq ft
Edges	Square and edgebanded
Sound Performance	ASTM C423-17 NRC: 0.83
Fire Performance	Class B
Variations	Slight and consistent variations in color and woodgrain should be expected when using this material. Slight imperfections are within normal manufacturing tolerances and not visible in standard installations.
Environmental	Panels consume a quarter of the natural resources and have a dramatically lower carbon footprint compared to equivalent millwork.
Maintenance	Vacuum to remove any loose dirt or dust. A damp cloth or compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a soap and water solution or Murphy's Oil soap.
Warranty	5 years
Unit of Sale	Per carton

Installation

Peel n Stick

Leave the hardware, screws, drills, and whatever else in the drawer! Peel n Stick is a double-sided press-on adhesive specifically designed for Mode products. To adhere, simply make a line guide, press-on planks, and go!

Dimensions

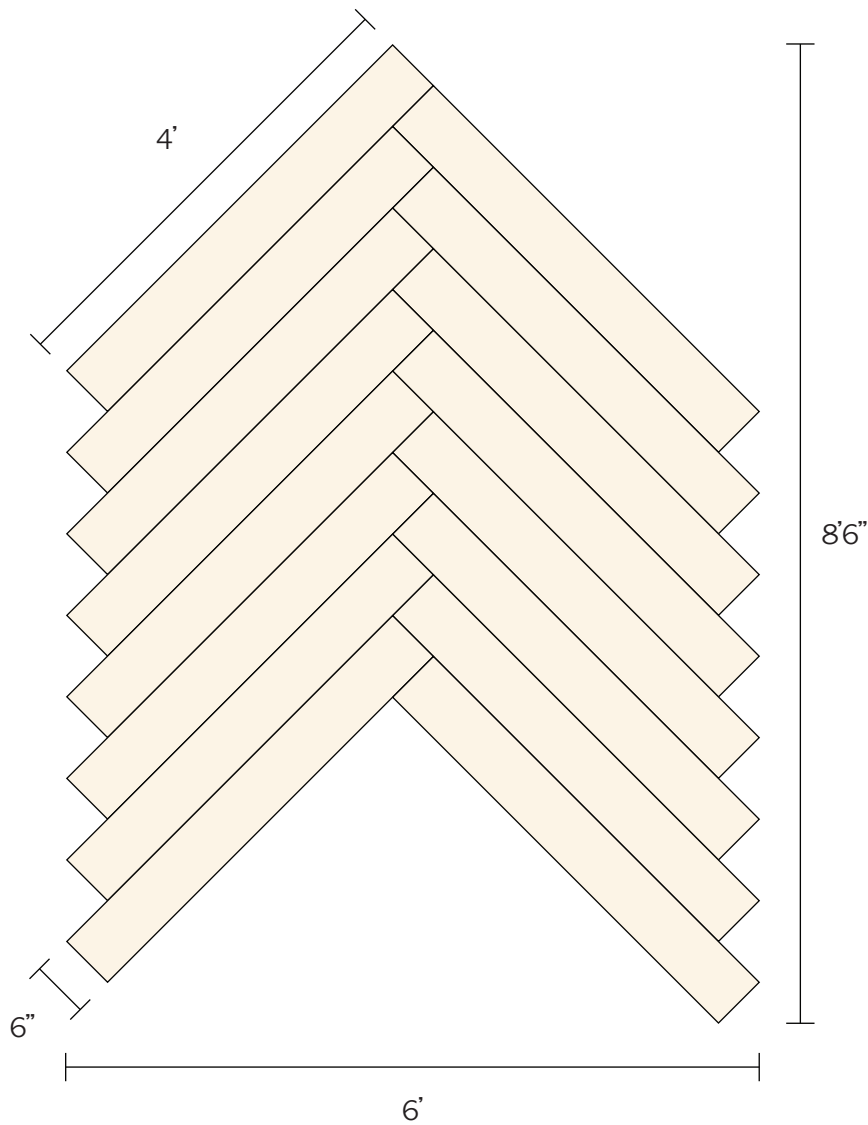

Color & Finishes




**Choose from over 100
custom wood species!**

Proudly partnering with



Test Results

Absorption Coefficient vs. Freq (Hz)

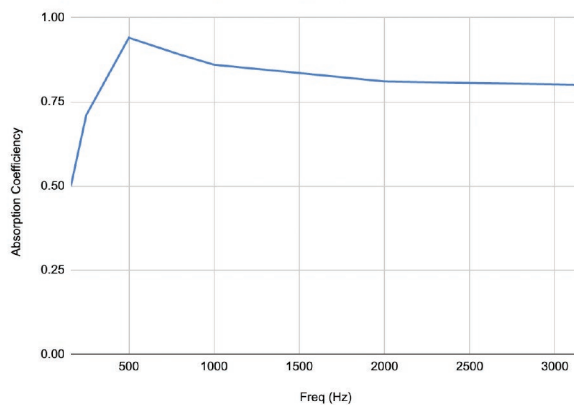

Freq (Hz)	Absorption Coefficient
-----------	------------------------

160	0.50
-----	------

250	0.71
-----	------

500	0.94
-----	------

800	0.89
-----	------

1000	0.86
------	------

2000	0.81
------	------

3150	0.80
------	------

NRC	0.83
------------	-------------

The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type F Mounting as defined by ASTM E795 using two pieces of 0.5 in aluminum stock bar placed on floor to lift material with trim pieces to simulate a typical wall installation with mounts.